
CU3E 30 TOUCH

SED-RATE SYSTEM

30 ESR RESULTS IN 25 MIN WITH MODIFIED WESTERGREN METHOD





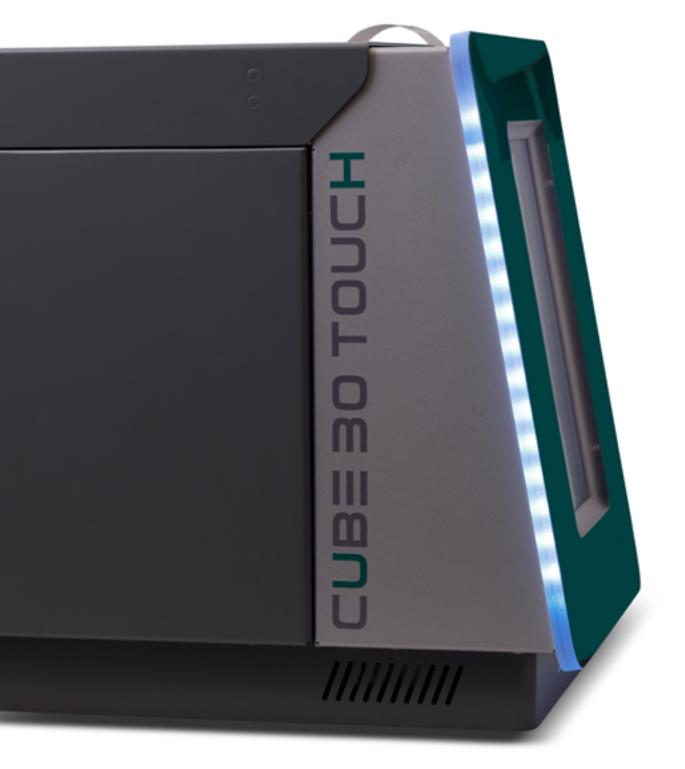


FEATURES

- BATCH / CONTINUOS WORKING MODE
- TOUCH SCREEN INTERFACE
- REDUCED SIZE
- NO SAMPLE CONSUMPTION
- NO WASTE FLUIDS
- SAFETY

Analyze different and non-dedicated tubes



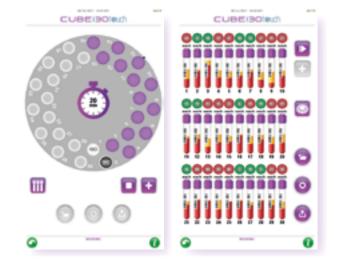

Environmentally friendly

No production of waste materials, without extra-cost for liquid waste disposal.

Test performed on edta/cbc samples

The test is performed on blood samples collected in the same top lavender tubes used for full blood count.

USER FRIENDLY

- Up to 30 samples simultaneously
- Internal bar-code reader
- Ease of use
- Reduction of turn-around time Standardization
- Internal mixing of samples by complete inversion of the tubes
- 10 inches colour touch screen
- Innovative graphic interface
- Fast Turn-Around Time (TAT)
- 30 results in less than 25 minutes







TECHNICAL CHARACTERISTICS

POWER SUPPLY 110 to 230 VAC (50 – 60Hz)

ABSORBED ELECTRICAL POWER max 100 W

DISPLAY 10,1" wide vertical type

WEIGHT 14 Kg

DIMENSIONS

MIXING OF SAMPLES

ICSH requirements

in compliance with CLSI and

450 x 390 x 297 mm (w x h x d)

NOISE LEVEL < 80 Db WORKING TEMPERATURE + 15° to + 35°C

BAR-CODE READER Automatic internal RELATIVE HUMIDITY from 20% to 80% without condensation



INSTRUMENTS AND ACCESSORIES

CUBE 30 TOUCH			
TEST DEVICE NEXT 500			
TEST DEVICE NEXT 1K			
TEST DEVICE NEXT 5K			
TEST DEVICE NEXT 10K			
ESR CONTROL CUBE			
ESR CONTROL CUBE			
EXTERNAL BAR-CODE READER			
THERMAL PAPER			

1	Ref. 10395
500 tests	Ref. 10293
1000 tests	Ref. 10294
5000 tests	Ref. 10296
10.000 tests	Ref. 10297
4 x 9 ml	Ref. 10435
2 x 9 ml	Ref. 10436
1	Ref. 20550510
1	Ref. 10403



www.diesse.it